

PASSEXAM 問題集

更に上のクオリティ 更に上のサービス



1年で無料進級することに提供する
<http://www.passexam.jp>

Exam : **1Y0-440**

Title : Architecting a Citrix
Networking Solution

Version : DEMO

1.A Citrix Architect has deployed NetScaler Management and Analytics System (NMAS) to monitor a high availability pair of NetScaler VPX devices.

The architect needs to deploy automated configuration backup to meet the following requirements:

- The configuration backup file must be protected using a password.
- The configuration backup must be performed each day at 8:00 AM GMT.
- The configuration backup must also be performed if any changes are made in the ns.conf file.
- Once the transfer is successful, auto-delete the configuration file from the NMAS.

Which SNMP trap will trigger the configuration file backup?

- A. netScalerConfigSave
- B. sysTotSaveConfigs
- C. netScalerConfigChange
- D. sysconfigSave

Answer: A

Explanation:

Reference: <https://docs.citrix.com/en-us/netscaler-mas/12/instance-management/how-to-backup-and-restore-using-mas.html#configuring-instance-backup-settings>

2.A Citrix Architect can execute a configuration job using a DeployMasterConfiguration template on a NetScaler_____deployed_____. (Choose the correct option to complete sentence.)

- A. CPX; as part of a high availability pair
- B. CPX; as a stand alone device
- C. SDX; with less than 6 partitions and dedicated management interface
- D. MPX; as part of the cluster but Cluster IP is NOT configured
- E. SDX; with no partitions as a stand alone device

Answer: C

3.Scenario: Based on a discussion between a Citrix Architect and a team of Workspacelab members, the MPX Logical layout for Workspacelab has been created across three (3) sites.

The requirements captured during the design discussion held for a NetScaler design project are as follows:

- Two (2) pairs of NetScaler MPX appliances deployed in the DMZ and internal network.
- High Availability will be accessible for each NetScaler MPX
- The external NetScaler MPX appliance will be deployed in multi-arm mode.
- The internal NetScaler MPX will be deployed in single-arm mode wherein it will be connected to Cisco ACI Fabric.
- All three (3) Workspacelab sites: Dc, NDR and DR, will have similar NetScaler configurations and design.

How many NetScaler MPX appliances should the architect deploy at each site to meet the design requirements above?

- A. 4
- B. 12
- C. 6
- D. 2


Answer: C

4.Scenario: A Citrix Architect and a team of Workspacelab members met to discuss a NetScaler design project.

They captured the following requirements from this design discussion:

- A pair of NetScaler MPX appliances will be deployed in the DMZ network.
- High Availability will be accessible in the NetScaler MPX in the DMZ Network.
- Load balancing should be performed for the internal network services like Microsoft Exchange Client Access Services and Microsoft App-V.
- The load balancing should be performed for StoreFront.
- The NetScaler Gateway virtual server will be utilizing the StoreFront load-balancing virtual server.
- The NetScaler Gateway virtual server and StoreFront.
- The NetScaler Gateway virtual service and StoreFront and load-balancing services are publicly accessible.
- The traffic for internal and external services must be isolated.

Click the Exhibit button to review the logical network diagram.

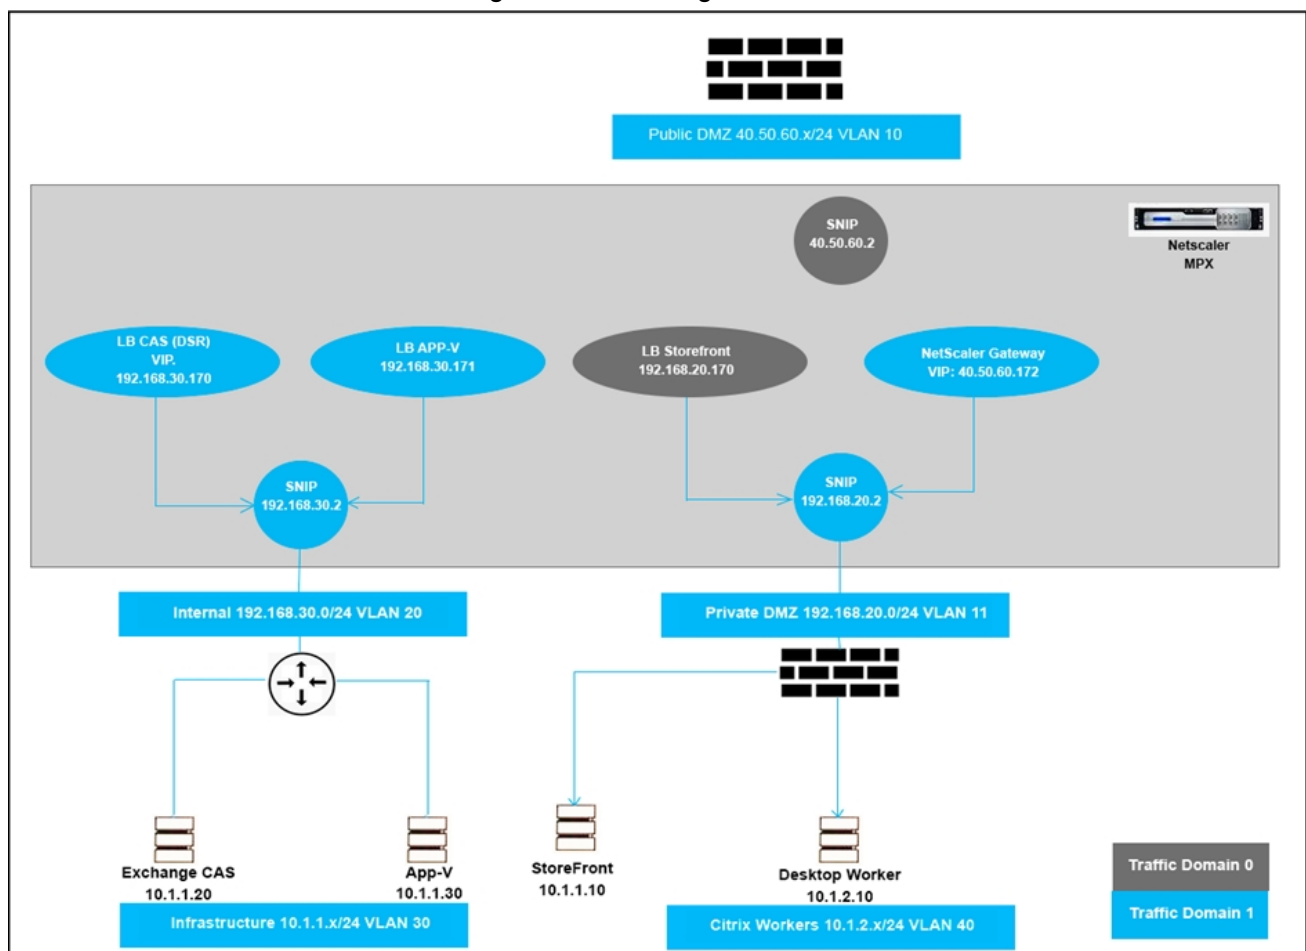

Which two design decisions are incorrect based on these requirements? (Choose two.)

- A. LB StoreFront bound to traffic Domain 0
- B. NetScaler Gateway VIP bound to Traffic Domain 1
- C. LB APP-V bound to Traffic Domain 1
- D. SNIP 192.168.20.2 bound to Traffic Domain 1

Answer: AB

5.Scenario: A Citrix Architect needs to plan for a customer environment in which more than 10,000 users will need access. The networking infrastructure needs to be able to handle the expected usage.

Which business driver should be prioritized based on the customer's requirement?

- A. Increase flexibility
- B. Enable mobile work styles
- C. Simplify management
- D. Increase Scalability
- E. Reduce Costs
- F. Increase Security

Answer: D