
**Exam** : **300-365**

**Title** : Deploying Cisco Wireless Enterprise Networks

**Version** : DEMO

1.Refer to Exhibit.

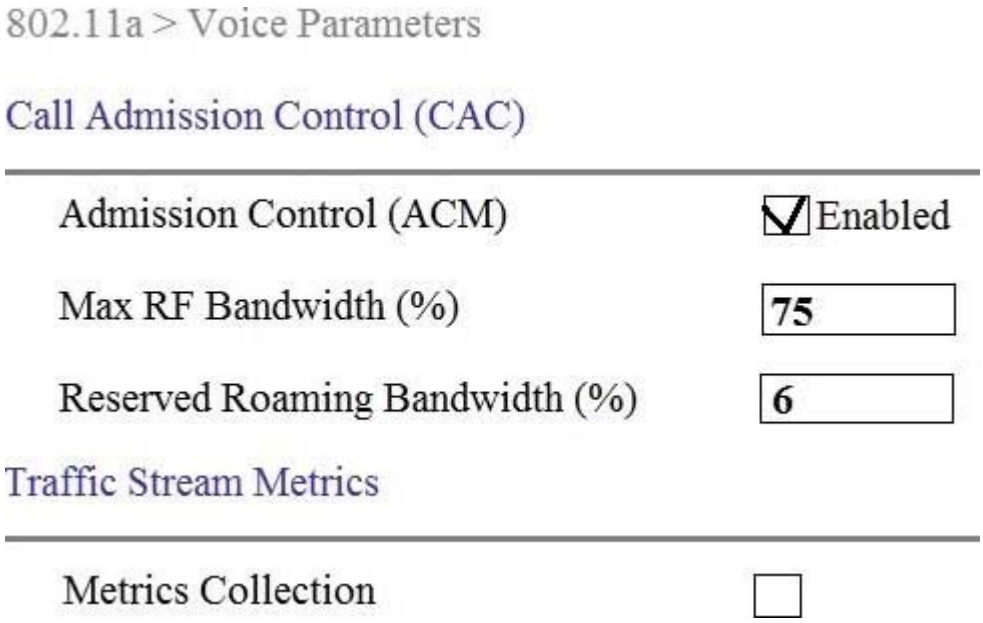


What two items need to be supported on the VoWLAN phones in order to take full advantage of this WLAN configuration? (Choose two.)

A. APSD
B. 802.11a
C. 802.11e
D. WMM
E. 802.11r
F. SIFS

**Answer:** C,D

2.A network engineer for a college dormitory notices that student devices are filling up the SP-DB and are not allowing the shared wireless printers to be discovered.

Which feature can be used to reserve space in the SP-DB for the printers?

A. mDNS-AP
B. LSS
C. Priority MAC
D. sso

**Answer:** C

3.Refer to Exhibit.

```
(WLC) >show interface summary
Interface Name                Vlan Id
------------------------      -------
deadnet                       999
users1                        14
users2                        15
users3                        16

(WLC) >show wlan 1
WLAN Identifier . . . . . . . . . . . . . . . . . . 1
Network Name (SSID) . . . . . . . . . . . . . . . . wlan1
AAA Policy Override . . . . . . . . . . . . . . . . Enabled
Interface . . . . . . . . . . . . . . . . . . . . . deadnet
FlexConnect Local Switching . . . . . . . . . . Enabled
FlexConnect Central Association . . . . . . . . Disabled
flexconnect Central Dhcp Flag . . . . . . . . . Disabled
flexconnect nat-pat Flag . . . . . . . . . . .  Disabled
flexconnect DNS Override Flag . . . . . . . . . Disabled
flexconnect PPPoE pass-through . . . . . . . .  Disabled
flexconnect local-switching IP-source-guar . .Disabled
FlexConnect Vlan based Central Switching . .  Enabled
FlexConnect Local Authentication . . . . . .  Disabled
FlexConnect Learn IP Address . . . . . . . . .  Enabled

(WLC) >show ap config general FlexAP1
AP Mode . . . . . . . . . . . . . . . . . . . . . . . . FlexConnect
FlexConnect Vlan mode : . . . . . . . . . . . . . . .  Enabled
            Native ID : . . . . . . . . . . . . . . . . . . . 1
            WLAN 1 : . . . . . . . . . . . . . . . . . . . .  10 (AP-Specific)
FlexConnect VLAN ACL Mappings
Vlan : . . . . . . . . . . . . . . . . . . . . . . . . 10
            Ingress ACL : . . . . . . . . . . . . . . . . . None
            Egress ACL : . . . . . . . . . . . . . . . . .  None
VLAN with least priority : . . . . . . . . . . . . . 13
FlexConnect Group . . . . . . . . . . . . . . . . .  flexgroup1
Group VLAN ACL Mappings
Vlan : . . . . . . . . . . . . . . . . . . . . . . . . 11
            Ingress ACL : . . . . . . . . . . . . . . . . . None
            Egress ACL : . . . . . . . . . . . . . . . . .  None
Vlan : . . . . . . . . . . . . . . . . . . . . . . . . 12
            Ingress ACL : . . . . . . . . . . . . . . . . . None
            Egress ACL : . . . . . . . . . . . . . . .  . . . None
Vlan : . . . . . . . . . . . . . . . . . . . . . . . . 13
            Ingress ACL : . . . . . . . . . . . . . . . . . None
            Egress ACL : . . . . . . . . . . . . . . . . .  None
FlexConnect Backup Auth Radius Servers :
Primary Radius Server . . . . . . . . . . . . . .  Enabled (Group Level1)
Secondary Radius Server . . . . . . . . . . . . .  Enabled (Group Level1)
```

A wireless client is connecting to FlexAPI which is currently working standalone mode.

The AAA authentication process is returning the following AVPs:

Tunnel-Private-Group-Id (81): 15
Tunnel-Medium-Type (65): IEEE-802(6)
Tunnel-Type (64): VLAN (13)
Which three behaviors will the client experience? (Choose three.)
A. While the AP is in standalone mode, the client will be placed in VLAN 15.
B. While the AP is in standalone mode, the client will be placed in VLAN 10.
C. When the AP transitions to connected mode, the client will be de-authenticated.
D. While the AP is in standalone mode, the client will be placed in VLAN 13.
E. When the AP is in connected mode, the client will be placed in VLAN 13.
F. When the AP transitions to connected mode the client will remain associated.
G. When the AP is in connected mode, the client will be placed in VLAN 15.
H. When the AP is in connected mode, the client will be placed in VLAN 10.
**Answer:** A,D,E

4.Which two options are limitations of using an AP as a workgroup bridge? (Choose two.)
A. Only factory-configured MAPs can support WGB mode.
B. MAPs that are configured in WGB mode do not answer S36 radio measurement requests.
C. A limited subset of Layer 2 security types are supported for wireless clients of a WGB.
D. There is a limit of 20 wired client devices.
E. Multiple VLANs are not supported for wireless clients.
**Answer:** B,D

5.On which AP radio or radios is Cisco WGB association supported?
A. 2.4 GHz only
B. 2.4 or 5 GHz only
C. 2.4, 5, or 4.9 GHz
D. 5 GHz only
**Answer:** B